



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

PCT/IB 03 / 01199 7'
27.03.03

REC'D 10 APR 2003

WIPS

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02076390.0

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

BEST AVAILABLE COPY



Anmeldung Nr:
Application no.: 02076390.0
Demande no:

Anmeldetag:
Date of filing: 09.04.02
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.
Groenewoudseweg 1
5621 BA Eindhoven
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se referer à la description.)

High pressure discharge lamp

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

H01J61/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU MC NL PT SE TR

High-pressure discharge lamp

EPO - DG 1
- 9. 04. 2002
(54)

The invention relates to a high-pressure discharge lamp having a quartz glass discharge vessel enclosing a discharge space with an ionizable filling, wherein a first electrode and a second electrode are present between which a discharge is maintained during lamp operation, wherein a first seal incorporates a first internal electric conductor which connects the first electrode to a first external electric conductor extending from the seal into the exterior, wherein said first seal further incorporates a gas-filled cavity which is at least partially surrounded by an external capacitive body. A lamp of the type described is known from WO 00/77826. The known lamp is suitable for operation in air, i. e. free from an outer envelope. For lamps intended for an accurate formation of a beam by means of an optical system, this is an important advantageous aspect. Particularly for applications such as, for example, in projectors, and motor vehicle headlamps, the avoidance of optical disturbances caused by an outer envelope plays an important role. It is important that the temperature of the electric conductor has a relatively low value at the area where it is exposed to air, in order that a rapid oxidation of the conductor is prevented. In the known lamp, this is realized by elongating the seal. In this description and the claims, quartz glass is understood to mean a glass having an SiO_2 content of at least 95%.

In high-pressure discharge lamps, ignition delay often occurs in practice when igniting the lamp. The risk of an ignition delay strongly increases when the lamp has been in the dark for some time. The occurrence of ignition delay is a great drawback and, under circumstances, may lead to dangerous situations, for example, when using a high-pressure lamp as a motor vehicle headlamp.

The known lamp has the advantage that the available cavity and the metal capacitive body, which is connected to the second electrode by means of a separate conductor, constitute a start-promoting means as a source of UV radiation when applying an electric voltage across the cavity. The UV radiation source is referred to as UV enhancer.

One drawback of the known lamp is that the conductor which connects the capacitive body near the first seal with the second electrode near the second seal, reduces the light that is emitted from the discharge vessel and which is reflected by a reflector wherein

the lamp is mounted. This can also cause unwanted shades. Furthermore the conductor is visible from the outside as a disturbing loose wire.

Another drawback of said lamp is that it is difficult to produce such a lamp, wherein the conductor wire must be welded to the electrode, and wherein the lamp with the conductor wire, which extends outside the lamp, must be mounted carefully in the reflector in order not to interfere with other components.

It is an object of the invention to provide a accurate and reliable lamp, which is easy and efficient to produce, wherein the aforementioned drawbacks are alleviated.

According to the invention, a high-pressure discharge lamp of the type described in the opening paragraph is characterized in that said external capacitive body is electrically isolated from the first and second electrodes. It was surprisingly discovered that the capacitive body and the gas-filled cavity of the lamp, which is used in a resonance ignition system at a frequency of for instance 150 kHz, still function as start-promoting means, even if the capacitive body is electrically isolated, i.e. not connected to an electrode. Therefore the electrodes of said lamp are preferably connected to a resonance ignition system having an ignition frequency of at least 50 kHz, preferably approximately 150 kHz. The advantage of an isolated capacitive body is that said conductor is not necessary anymore, resulting in a better lighting performance and easier production of the lamp.

In a first preferred embodiment the external capacitive body comprises a wire which is wound around the seal. In a second preferred embodiment the external capacitive body comprises a resilient clamp body which clips partially around the seal. Other embodiments are of course possible, and will be obvious for the skilled man.

In an advantageous embodiment of the lamp according to the invention, the internal electric conductor is a foil which extends through the cavity. On the one hand, this is a considerable simplification of the seal construction and its manufacture and, on the other hand, it has the important advantage that a strong concentration of an electric field is produced at the edges of the foil as soon as a voltage is applied to the conductor. This enhances breakdown in the UV enhancer.

Preferably, the gaseous constituent of the filling in the cavity comprises mercury vapour and preferably furthermore a rare gas such as Argon. This has the advantage that relatively much UV radiation is generated by the UV enhancer, which particularly contributes to a rapid and reliable cold ignition, or a rapid ignition in the dark. A further advantage of the lamp according to the invention is that no separate mercury dosage appears to be necessary. This is easily realizable by making the first seal after the discharge vessel

has been provided with its filling. For the purpose of electrical connection of the second electrode, the lamp is provided with a second seal for feedthrough of an electric conductor to the second electrode. For reasons of an efficient production of the lamp according to the invention, this second seal has the same construction as the first seal.

5 The invention also relates to a lamp assembly, wherein the lamp according to the invention is mounted in a fitting of a lamp reflector, wherein said capacitive body is at least partially mounted within said fitting. Preferably said lamp and said capacitive body are mounted together in said fitting by means of cement. Thereby said capacitive body does not obstruct the light that is emitted from the lamp.

10 The invention furthermore relates to a method for producing a high-pressure discharge lamp wherein a quartz glass discharge vessel enclosing a discharge space is filled with an ionizable filling, wherein a first electrode and a second electrode are placed such that a discharge can be maintained during lamp operation, wherein a first seal is provided with a first internal electric conductor which connects the first electrode to a first external electric
15 conductor extending from the seal into the exterior, wherein said first seal is further provided with a gas-filled cavity which is at least partially surrounded by an external capacitive body, wherein said external capacitive body is electrically isolated from the first and second electrodes.

 These and other aspects of the invention are apparent from and will be
20 elucidated with reference to the embodiments described hereinafter. In the drawings: Fig. 1 shows a prior art lamp, comprising a collapsed seal; Fig. 2 shows the collapsed seal of Fig. 1 in detail; Fig. 3 shows an embodiment of the lamp according to the invention;

 Fig. 4 shows a seal provided with a resilient clamp body; and

 Fig. 5 shows a side view of the resilient clamp body. Fig. 1 (not to scale) shows
25 a high-pressure discharge lamp 1 provided with a glass discharge vessel 2 which encloses a discharge space 3 with an ionizable filling, in which a first electrode 4 and a second electrode 40 are present, between which a discharge extends during lamp operation, and having a first seal 5 incorporating an electric conductor 6 in the form of a foil which connects the first
30 electrode 4 to a metal wire 7 projecting to the exterior from the first seal, which first seal has a first gas tight portion 5a and a second gas tight portion 5b between which a gas-filled cavity 10 is present. The cavity comprises at least a gaseous constituent of the filling. For example, the cavity comprises mercury vapour and argon.

 At the area of the cavity, the first seal has a first external capacitive body 45. The first seal is connected to the discharge vessel at the area of a neck 8. At the area of the

neck, a second external capacitive body 42 is present which is electrically connected to the first external capacitive body by means of a conductor 43. Capacitive body 42 increases the electrical field inside the vessel at around electrode 4. The first seal 5 constitutes a collapsed seal. The foil 6 is an Mo strip having knife edges. The metal wire 7 is secured to one end 6a of the strip, for example, by welding and projects to the exterior from the seal and from the discharge vessel. An electrode rod 4a of the first electrode 4 is secured to a further end 6b of the strip 6. On the side facing the first electrode 4, the discharge vessel of the second electrode 40 and a second seal 50, with a cavity 100 and a neck 80, has a comparable construction. The second electrode is connected to a wire 70. In the operating condition of the lamp, a discharge extends between the electrodes. In the embodiment described, the first and the second external capacitive body 45, 42 are electrically connected to the second electrode 40 by means of a conductor 46. Thus a passive serial capacitive body is realized. Fig. 2 (not to scale) shows the first collapsed seal of the lamp of Fig. 1 in detail, in which Fig. 2A shows the first seal with strip 6 in a plan view and Fig. 2B shows it with strip 6 in a side elevation. In Fig. 2, the capacitive bodies 45 and 43 are not shown for the sake of clarity. In a first embodiment of the lamp according to the invention, shown in Fig. 3, the first capacitive body 45 is an electrically isolated first wire loop of an electrically isolated wire 48 at the area of the cavity 10, which is wound with some turns around the first seal 5 as far as the neck 8 where it forms the capacitive body 42. This embodiment is advantageous because of the possibility of a simple construction of the capacitive bodies 45 and 42, formed from a single wire. Because the lamp operates at a very high frequency of for instance 150 kHz between the electrodes, a connection between the capacitive bodies 45 and 42 and electrode 40 is not necessary for applying the necessary voltage across the cavity 10, since this voltage is already generated in the capacitive bodies by capacitance coupling.

In an advantageous embodiment of the lamp, the capacitive bodies are formed as resilient clamp bodies. Fig. 4 shows (not true to scale) how the first seal is provided with such capacitive bodies. In the embodiment shown, the first seal, which has a substantially round circumference, is clamped by four resilient clamp bodies. A first resilient clamp body 45' located at the cavity forms the first capacitive body and a second resilient clamp body 42' located at the neck 8 forms the second capacitive body. A third resilient clamp body 44 is located close to the second gas tight portion 5a of the first seal. A fourth resilient clamp body 47 is provided in between the resilient clamp bodies 45' and 42'. The resilient clamp bodies 44, 42', 45', 47 are interconnected by connection bodies 401, 402, 403. Due to the presence of the cavity 10, the circumference of the first seal is somewhat larger at the cavity than on

either side thereof. Preferably the fourth resilient clamp body is located immediately beside the larger circumference. The shown configuration has the advantage that the position of the first capacitive body 45' is substantially fixed in this way due to the differences in the circumference. A further advantage is that the capacitive bodies can be produced as separate lamp parts and can be mounted on the lamp in a simple way afterwards. Preferably, the resilient clamp bodies and the connection bodies are made in one piece. Fig. 5 shows a side view of the resilient clamp bodies 44, 45', 42', 47 and connection bodies 401, 402, 403 made in one piece.

In a practical realization of the lamp in accordance with the embodiment shown, the lamp is a high-pressure mercury discharge lamp having a nominal power of 120 W. The lamp, which is intended for projection purposes, has a discharge vessel with an internal diameter of 4 mm and an electrode distance of 1 mm. The discharge vessel has an ionizable filling which, in addition to mercury and a rare gas, for example, argon having a filling pressure of 100 mbar, also comprises bromine. During operation of the lamp, a pressure of 160 bar or more prevails in the discharge vessel. The discharge vessel is made of quartz glass having a largest thickness of 2.5 mm. The knife-edged strip is an Mo strip to which a metal wire is secured at one end. An electrode rod of a first electrode is secured to the other end of the strip. The lamp is provided on each side with a collapsed seal each having a length of 28 mm. A length of 5 mm of the collapsed seal is already adequate for hermetically sealing the discharge vessel. The remaining length of the collapsed seal is used to give the temperature of the electric conductor a sufficiently low value at the area where it is exposed to air. Each collapsed seal has a cavity. Each collapsed seal has a length of 7 mm between the discharge space and the relevant cavity. Each cavity has a length of 5 mm or even smaller.

The first seal is provided with a first capacitive body at the area of the cavity, in the form of a wire winding which extends in 2 to 3 turns as far the neck between the seal and the discharge vessel, where it forms a second capacitive body in a closed winding. The second capacitive body is spaced apart from the discharge space through a distance of between 1 mm and 3 mm. The wire has a diameter of 0.5 mm.

In a further practical realization the first seal is provided with four resilient clamp bodies made of an electrically conductive, heat-resistant material, in the described case stainless steel RVS310. The resilient clamp body located at the cavity has a width of 3 mm. The other resilient clamp bodies each have a width of 1 mm. The resilient clamp bodies are

interconnected by connection bodies having a width of 2mm. The resilient clamp bodies and the connection bodies are made from one piece of material.

The lamp manufacture starts from a quartz glass tube in which a vessel is formed which is provided with tubular parts at two diametrically opposed locations, which
5 tubular parts will serve for the manufacture of seals. First, a seal is made on the lamp vessel, for example a collapsed seal after a knife-edged strip and a conductor and electrode secured thereto in known manner have been provided, which collapsed seal is realized by heating the relevant tubular part in such a way that it softens and flows out under the influence of a prevailing sub-atmospheric pressure. This is preferably done by means of a laser beam
10 rotating with respect to the tubular part, which rotating beam is moved from the conductor towards the electrode rod. By interrupting the laser beam at the location of the strip for some time, a gas tight cavity is realized. The cavity thus formed comprises a gas which is present in the tubular part and the discharge space during manufacture of the collapsed seal. This is generally a rare gas with which the quartz glass tube is rinsed during manufacture of the
15 seal. For reasons of an efficient manufacture, the rare gas which will form part of the filling of the discharge vessel will preferably be used for this purpose. Subsequently, the discharge vessel is provided with the constituents required for the filling, whereafter a knife-edged strip with secured electrode and ditto conductor is provided at the area of the other tubular part. Subsequently, a collapsed seal is made in a corresponding manner also in the other tubular
20 part by heating and consequent flowing of the tubular part. The cavity thus formed is thus also automatically filled with vapour of the filling present in the discharge vessel, particularly mercury vapour. This is a great advantage for a satisfactory start-enhancing operation. It has been found that the collapsed seals thus formed qualitatively constitute equally good seals as in the case where the collapsed seals do not have a gas tight cavity. A practical lamp of the
25 type described above requires a resonant voltage of 1.5 kV for cold ignition, for example a voltage in the form of a high-frequency signal during 1 to 3 ms of, for example, 50 kHz for generating a breakdown in the cavity whereafter substantially instantaneously a discharge is produced in the discharge vessel between the electrodes, which will subsequently develop to a stable discharge arc so that the lamp operates in a stable manner. The lamp reaches its
30 stable operating state after not more than 1 minute. In the same practical lamp, a maximum strike delay occurs after extinction of the lamp upon hot restrike of the lamp by means of a high-frequency signal of 5 kV after at most 60 s, with the power supplied during hot restrike to the lamp remaining limited to 120 W. In the case of a comparable lamp without a cavity in one of the seals, the required ignition voltage is 20 kV under otherwise equal conditions.

CLAIMS:

EPO - DG 1
- 9. 04. 2002

(54)

1. A high-pressure discharge lamp having a quartz glass discharge vessel enclosing a discharge space with an ionizable filling, wherein a first electrode and a second electrode are present between which a discharge is maintained during lamp operation, wherein a first seal incorporates a first internal electric conductor which connects the first
5 electrode to a first external electric conductor extending from the seal into the exterior, wherein said first seal further incorporates a gas-filled cavity which is at least partially surrounded by an external capacitive body, characterized in that said external capacitive body is electrically isolated from the first and second electrodes.
- 10 2. A lamp according to claim 1, wherein the external capacitive body comprises a wire which is wound around the seal.
3. A lamp according to claim 1, wherein the external capacitive body comprises a resilient clamp body which clips partially around the seal.
- 15 4. A lamp according to any one of the preceding claims 1 - 3, wherein the internal electric conductor is a foil which extends through the cavity.
5. A lamp according to any one of the preceding claims 1 - 4, wherein the gas-
20 filling of the cavity comprises mercury vapour.
6. A lamp assembly, wherein the lamp according to any one of the preceding claims 1 - 5 is mounted in a fitting of a lamp reflector, wherein said capacitive body is at least partially mounted within said fitting.
- 25 7. A lamp assembly according to claim 6, wherein said lamp and said capacitive body are mounted in said fitting by means of cement.

8. A lamp assembly according to claim 6 or 7, wherein the electrodes of said lamp are connected to a resonance ignition system having a frequency of at least 50 kHz, preferably approximately 150 kHz.

5 9. A method for producing a high-pressure discharge lamp wherein a quartz glass
discharge vessel enclosing a discharge space is filled with an ionizable filling, wherein a first
electrode and a second electrode are placed such that a discharge can be maintained during
lamp operation, wherein a first seal is provided with a first internal electric conductor which
connects the first electrode to a first external electric conductor extending from the seal into
10 the exterior, wherein said first seal is further provided with a gas-filled cavity which is at
least partially surrounded by an external capacitive body, characterized in that said external
capacitive body is electrically isolated from the first and second electrodes.

ABSTRACT:

A high-pressure discharge lamp (1) having a quartz glass discharge vessel (2) enclosing a discharge space (3) with an ionizable filling, wherein a first electrode (4) and a second electrode (40) are present between which a discharge is maintained during lamp operation, wherein a first seal (5) incorporates a first internal electric conductor (6) which connects the first electrode (4) to a first external electric conductor (7) extending from the seal (5) into the exterior, wherein said first seal (5) further incorporates a gas-filled cavity (10) which is at least partially surrounded by an external capacitive body (42, 42', 43, 44, 45, 45', 46, 48), and wherein said external capacitive body (42, 42', 43, 44, 45, 45', 46, 48) is electrically isolated from the first and second electrodes (4, 40).

10

Fig. 3

EPO - DG 1
- 9. 04. 2002

(54)

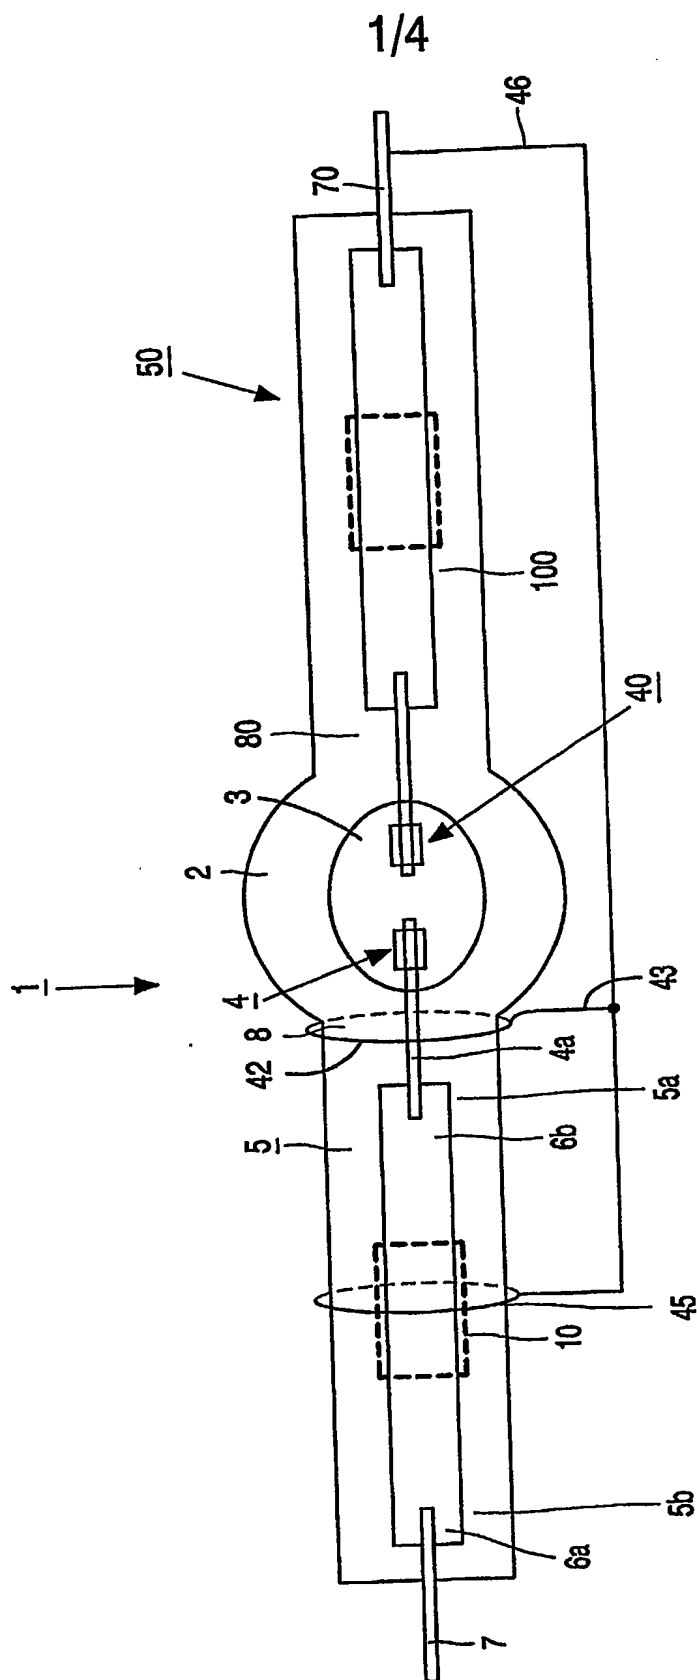


FIG. 1

EPO - DG 1
- 9. 04. 2002

(54)

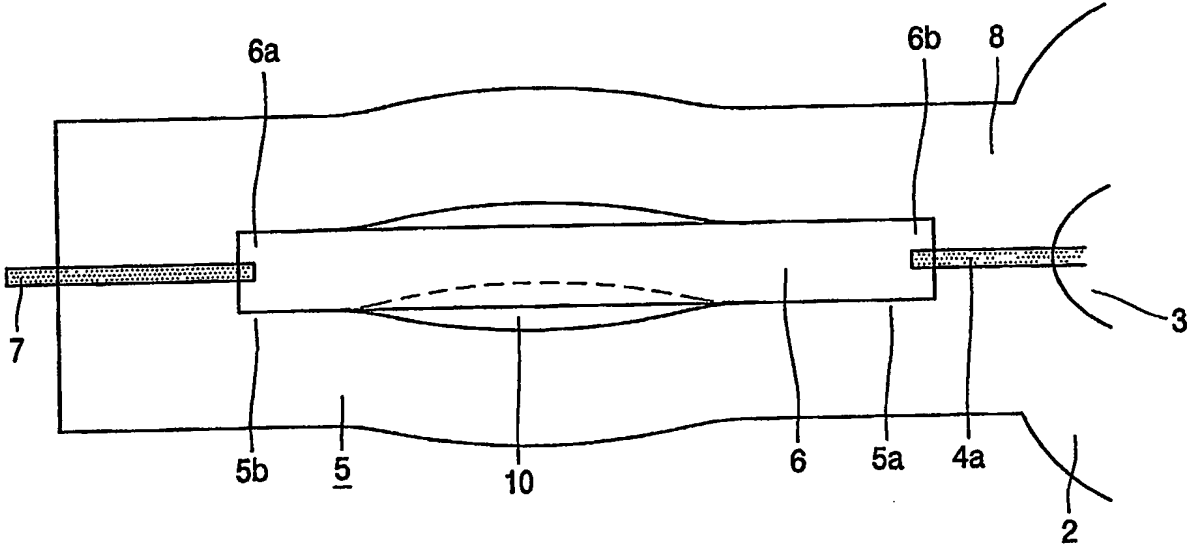


FIG. 2A

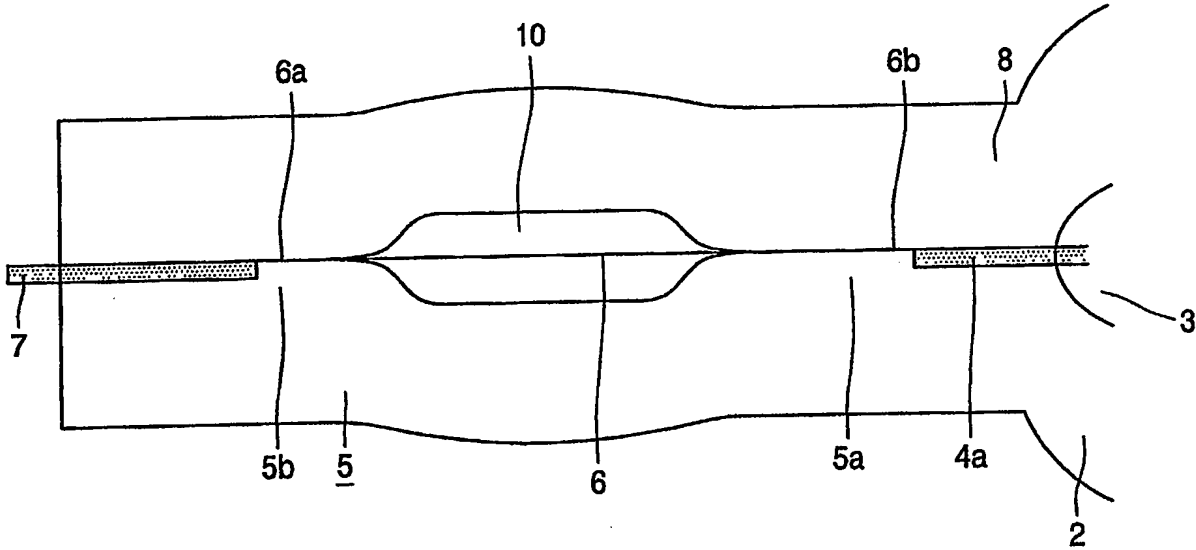


FIG. 2B

3/4

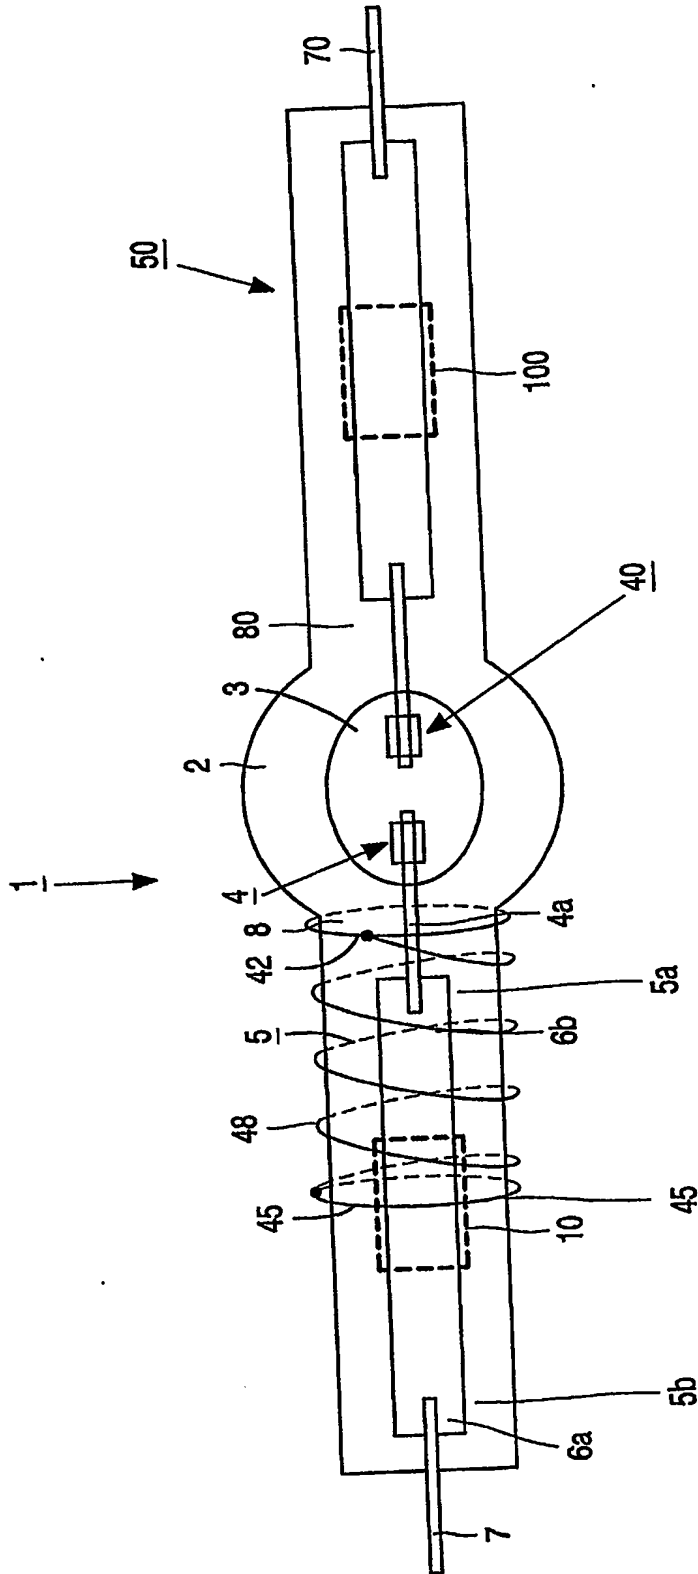


FIG. 3

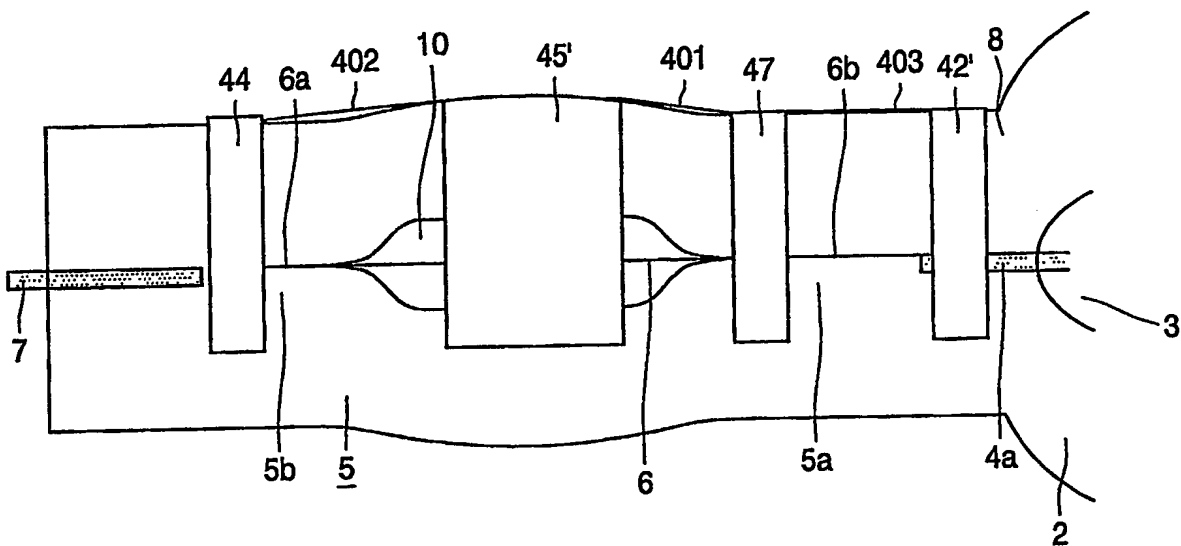


FIG. 4

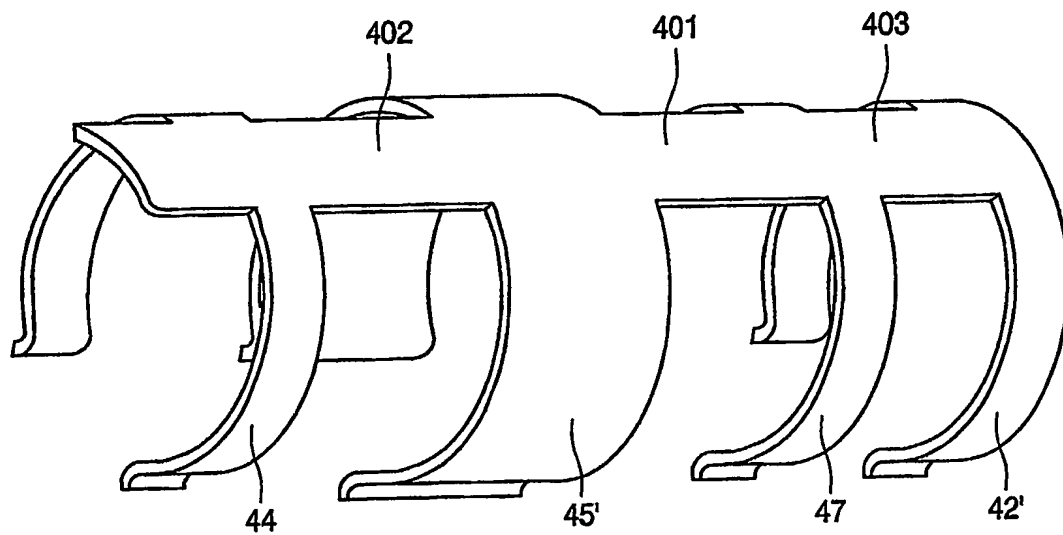


FIG. 5

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.